

# 26КААВ, 26КАТФ, 26SFAW, 26SFТF, 26КАIВ

## Технические характеристики

### По вопросам продаж и поддержки обращайтесь:

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	



Qualität von Anfang an.

## Technische Daten

### BAUFORM

Universell einsetzbare Standard- Verschlusskupplung aus Messing. Durch die geschlossene Entriegelungshülse wird ein Verschmutzen der Innenteile verhindert.

Robuste Bauweise, gehärtete Verriegelungsstifte, viele Anschlußvarianten, alle Teile nicht rostend. Die Abdichtung zwischen Kupplung und Stecker erfolgt bereits, bevor das Ventil geöffnet wird.

### WERKSTOFFE

Gewindestück: Messing MS 58  
Ventilkörper: Messing MS 58  
Entriegelungshülse: Messing MS 58  
Ventil: Messing MS 58  
Federn, Sprengring: 1.4310  
Kugeln: 1.4034  
Dichtungen: NBR

Stecktülle, Stecknippel: Messing MS 58

### NENNWEITE

7,2 mm

### DRUCKBEREICH

35 bar maximaler statischer Druck (ohne Pulsation) bei min. 4-facher statischer Sicherheit.

### BETRIEBSTEMPERATUR

-20°C bis 100°C

### OPTIONEN

Eine Ausführung mit Gewindestück, Ventilkörper, Entriegelungshülse, sowie Stecktüllen und Stecknippel aus MS 58- vernickelt sind auf Anfrage erhältlich.

Alle Angaben sind freibleibend und unverbindlich!

## Specification

### DESIGN

Standard quick connect coupling made of brass for universal use. The internal parts are protected against dirt penetration by the tight sleeve.

Durable construction, hardened locking pins, many connecting variations, all parts are non-rusting. The connection between the intermediate coupling and the plug is tightly sealed before the valve is opened.

### MATERIAL

Back body: Brass MS 58  
Valve body: Brass MS 58  
Sleeve: Brass MS 58  
Valve: Brass MS 58  
Spring and Locking ring: AISI 301  
Locking balls: AISI 420  
Seals: NBR

Plug: Brass MS 58

### NOMINAL DIAMETER

7,2 mm

### PRESSURE RANGE

35 bar maximum static working pressure with safety factor of 4 to 1.

### TEMPERATURE RANGE

-20°C up to 100°C

### OPTIONS

A additional version with Back body, Valve body, Sleeve and plug made of nickel-plated brass is available on request.

The above information is intended for guidance only and the company reserves the right to change any data herein without prior notice!

Artikel:

**26xxxxxx**

**Schnellverschluß-  
kupplungen**

**Messing**



Type:

**26xxxxxx**

**quick coupling**

**brass**






Bestellangaben / Ordering number

1. - 6. Stelle / Digit Produkt / Product	7. + 8. Stelle / Digit Anschlußgrößen / Connection sizes
<b>26KAAW</b> = Kupplungsstück mit Gewindeanschluß / coupling with threaded connection	<b>G</b> 13 = 1/4" 17 = 3/8" 21 = 1/2"

Abmessungen / Dimension

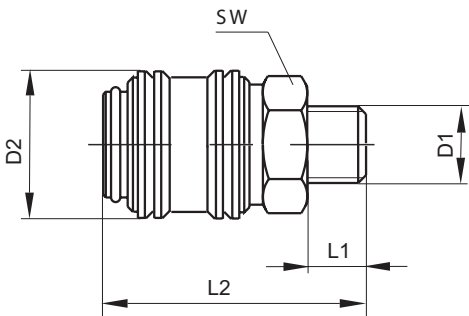


G	D1	D2	L1	L2	SW
[ " ]	[ " ]	[mm]	[mm]	[mm]	[mm]
1/4	1/4	25	9	39	22
3/8	3/8	25	9	41	22
1/2	1/2	25	12	44	22



Bestellangaben / Ordering number

1. - 6. Stelle / Digit Produkt / Product	7. + 8. Stelle / Digit Anschlußgrößen / Connection sizes
<b>26KATF</b> = Kupplungsstück mit Schlauchanschluß / coupling with hose connection	<b>Schlauch- Ø</b> 06 = 6 mm 09 = 9 mm 13 = 13 mm

Abmessungen / Dimension

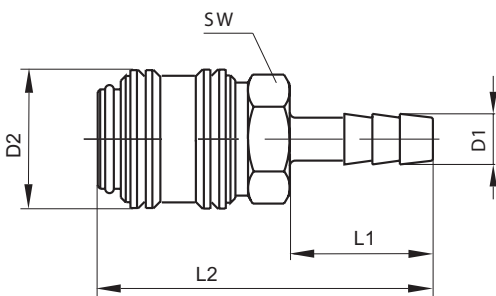

Ø S	D1	D2	L1	L2	SW
[mm]	[mm]	[mm]	[mm]	[mm]	[mm]
6	6	25	25	58	21
9	9	25	25	58	21
13	9	25	25	58	21






Bestellangaben / Ordering number

1. - 6. Stelle / Digit Produkt / Product	7. + 8. Stelle / Digit Anschlußgrößen / Connection sizes
<b>26SFAW</b> = Einstecktülle mit Gewindeanschluß / Plug with threaded connection	<b>G</b> 13 = 1/4" 17 = 3/8" 21 = 1/2"

Abmessungen / Dimension

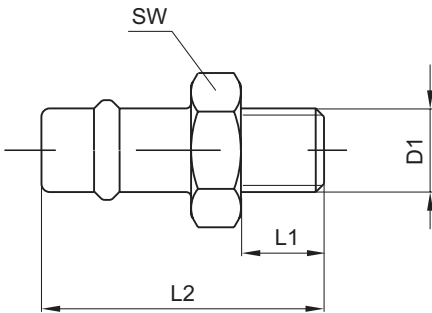


G	D1	L1	L2	SW
[ " ]	[ " ]	[ mm ]	[ mm ]	[ mm ]
1/4	1/4	9	33	17
3/8	3/8	9	33	19
1/2	1/2	12	38	24



Bestellangaben / Ordering number

1. - 6. Stelle / Digit Produkt / Product	7. + 8. Stelle / Digit Anschlußgrößen / Connection sizes
<b>26SFTF</b> = Einstecktülle mit Schlauchanschluß / Plug with hose connection	<b>Schlauch- Ø</b> 06 = 6 mm 08 = 8 mm 09 = 9 mm 10 = 10 mm 13 = 13 mm

Abmessungen / Dimension

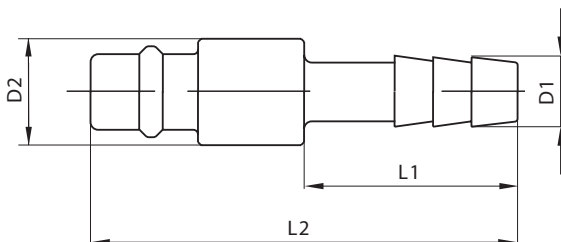

Ø S	D1	D2	L1	L2
[ mm ]	[ mm ]	[ mm ]	[ mm ]	[ mm ]
6	6	12	25	48
8	8	12	25	48
9	9	12	25	48
10	10	12	25	48
13	13	15	25	48



# Quick release coupling 3/8" internal, brass / NBR, max. 35bar

item number:

**26KAIW17**

Quick release

coupling 3/8 "inside brass / NBR, max. 35bar

---



<b>item number</b>	26KAIW17
<b>description</b>	Quick release coupling 3/8 "inside, brass / NBR, max. 35bar
<b>Weight [kg]</b>	0.080000
<b>material</b>	Bright brass
<b>Nominal size</b>	3/8 "
<b>Connection variant</b>	internal thread

# Quick release coupling 1/2" internal, brass / NBR, max.35bar

item number:

**26KAIW21**

Quick release

coupling 1/2 "inside brass / NBR, max 35bar

---



<b>item number</b>	26KAIW21
<b>description</b>	Quick release coupling 1/2 "inside, brass / NBR, max.35bar
<b>Weight [kg]</b>	0.089000
<b>material</b>	Bright brass
<b>Nominal size</b>	1/2 "
<b>Connection variant</b>	internal thread

# Quick release coupling 1/4" internal, brass / NBR, max. 35bar, nickel-plated

item number: **26KAIW13 / MPN**

Quick release  
coupling 1/4 "inside brass / NBR, max. 35bar, nickel-plated

---



<b>item number</b>	26KAIW13 / MPN
<b>description</b>	Quick release coupling 1/4 "inside, brass / NBR, max. 35bar, nickel-plated
<b>Weight [kg]</b>	0.089000
<b>material</b>	Nickel-plated brass
<b>Nominal size</b>	1/4 "
<b>Connection variant</b>	internal thread

**По вопросам продаж и поддержки обращайтесь:**

Алматы (7273)495-231	Казань (843)206-01-48	Новокузнецк (3843)20-46-81	Смоленск (4812)29-41-54
Архангельск (8182)63-90-72	Калининград (4012)72-03-81	Новосибирск (383)227-86-73	Сочи (862)225-72-31
Астрахань (8512)99-46-04	Калуга (4842)92-23-67	Омск (3812)21-46-40	Ставрополь (8652)20-65-13
Барнаул (3852)73-04-60	Кемерово (3842)65-04-62	Орел (4862)44-53-42	Сургут (3462)77-98-35
Белгород (4722)40-23-64	Киров (8332)68-02-04	Оренбург (3532)37-68-04	Тверь (4822)63-31-35
Брянск (4832)59-03-52	Краснодар (861)203-40-90	Пенза (8412)22-31-16	Томск (3822)98-41-53
Владивосток (423)249-28-31	Красноярск (391)204-63-61	Пермь (342)205-81-47	Тула (4872)74-02-29
Волгоград (844)278-03-48	Курск (4712)77-13-04	Ростов-на-Дону (863)308-18-15	Тюмень (3452)66-21-18
Вологда (8172)26-41-59	Липецк (4742)52-20-81	Рязань (4912)46-61-64	Ульяновск (8422)24-23-59
Воронеж (473)204-51-73	Магнитогорск (3519)55-03-13	Самара (846)206-03-16	Уфа (347)229-48-12
Екатеринбург (343)384-55-89	Москва (495)268-04-70	Санкт-Петербург (812)309-46-40	Хабаровск (4212)92-98-04
Иваново (4932)77-34-06	Мурманск (8152)59-64-93	Саратов (845)249-38-78	Челябинск (351)202-03-61
Ижевск (3412)26-03-58	Набережные Челны (8552)20-53-41	Севастополь (8692)22-31-93	Череповец (8202)49-02-64
Иркутск (395)279-98-46	Нижний Новгород (831)429-08-12	Симферополь (3652)67-13-56	Ярославль (4852)69-52-93
Россия (495)268-04-70	Киргизия (996)312-96-26-47	Казахстан (7172)727-132	

Эл. почта [efg@nt-rt.ru](mailto:efg@nt-rt.ru) || Сайт: <https://end.nt-rt.ru/>